





ANNAPURNA BHASKARI  
GROUP

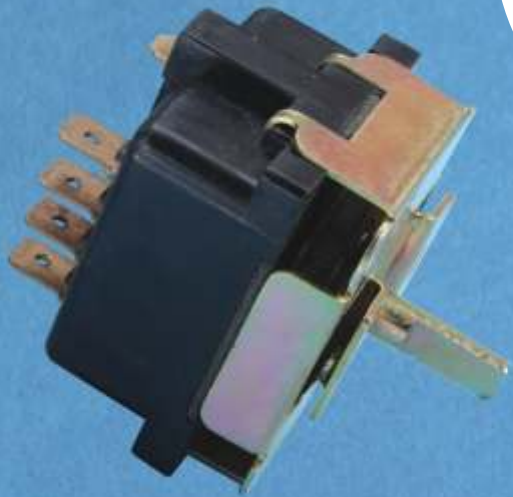


# Switches & Thermostats

For Hot Application


## Stem Thermostat

Product	Model	Nominal Stem Length	Range °C	Differential °C	Rating	Insulation Level	Approx. Weight (Gms)	Applications
	BST-7	7"/175mm	25-75	<5	20A, 240V AC only	1.5 KV for 1Min	46	Electric Water Heaters & Geysers, Water Baths
	BST-11	11"/275 mm					56	



## Thermal Cut-out

Product	Model	Nominal Stem Length	Operating Temp. °C	Rating	Insulation Level	Applications
	BTC-7	7"/175mm	90	20A, 240V ac only	1.5 KV for 1Min	Electric Water Heaters & Geysers, Water Baths
	BTC-11	11"/275 mm				



## Combistat

Product	Model	Nominal Stem Length	Range °C	Max. Operating Temp. °C	Differential °C	Rating	Insulation Level	Applications
	BCS-6	6"/150mm	25-75	120	<5	20A, 240V AC only	1.5 KV for 1Min	Electric Water Heaters & Geysers, Water Baths
	BCS-9	9"/225 mm						
	BCS-11	11"/275 mm						

## Heater Thermostat

Product	Model	Sensor	Rotating Angle (deg)	Range °C	Differential °C	Rating	Insulation Level	Applications
	BHT-90	SS Cup	0-270	25-90	5 ± 2	16A, 250V AC only	1.8 KV for 1Min	Washing Machine
	BHT-85	SS Flange	0-270	25-80				
	BHT-95	Copper Bulb	0-270	25-95				
	BHT-110	Copper Bulb	0-270	30-110				

## Oven Thermostat

Product	Model	Rotating Angle (deg)	Range °C	Differential °C	Rating	Insulation Level	Capillary Length	Capillary Material	Bulb	Applications
	BOT-R	0-315	0-315	5 ± 2	16A, 250V ac only	1.8 KV for 1Min	Max. Length 1000mm	SS	Length & Dia varies as per Temp. Range	Ovens
	BOT-PT	0-315	0-315				Max. Length 1000mm	SS		Ovens

# Rotary Switch

Product	Model	Rotating Angle (deg)	Rating	Insulation Level	Applications
	BRS-8S-4T	0-360	AC 125V/250V 20 A, 50/60 Hz	1.8 KV for 1Min	Acs
	BRS-8S-5T/1				
	BRS-8S-5T/2				
	BRS-6S-4T	0-270			
	BRS-6S-5T				
	BRS-3S-3T				
	BRS-6S-4T				

## ANNAPURNABHASKARI GROUP